




Sleek and powerful, install the XL High Bay in places a traditional High Bay cannot go. Save up to 55% on your energy bills.



## Supreme fusion of energy savings, durability, versatility and easy installation...

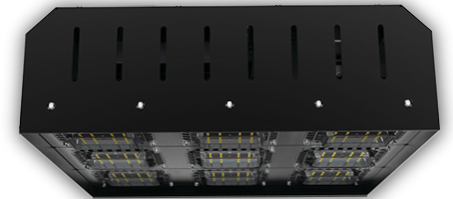

### Key Features

- Modular design allows for separation of components for best heat dissipation
- Patented thermal management allows for -30°C to +55°C ambient operating temperatures
- Light weight design easily installed by one person
- IP65 rated, IP67 (optional)
- 120° optics standard, 85° x 135°, 45° beam spread options
- Rated Life >50,000 hours
- 5-year limited warranty

### Mounting

- Four (4) mounting options available
  - Hanging Ring
  - Universal Hanging Bracket
  - Ceiling Surface Mounting
  - 1/2" NPT threaded conduit
- Hinged faceplate for easy access to components

### Applications

- Warehousing
- Garage
- Security
- Rail Yards
- Loading Docks
- Replaces High Intensity Discharge
- 3 – 20m mounting heights


### Electrical

- 120-277VAC 50/60Hz
- Dimmable and motion sensor compatible (optional)
- Power Factor > 0.95
- THD < 15%


### LED Module

- Cree XT-E LED chip
- 120° beam spread standard
- 4,600 – 40,000lumens, >82lms/W
- CRI >70%


## Dimensions / Drawing

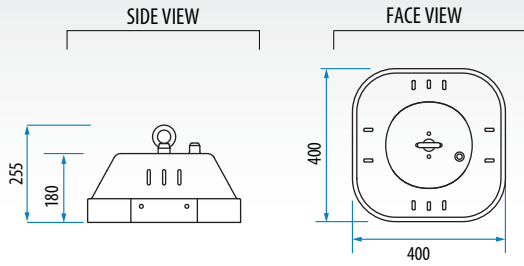

LF-XL/150W/50/RL/UNV/HB

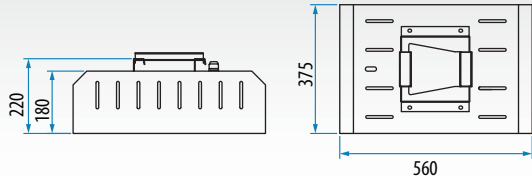


LF-XL/300W/50/EL/UNV/HB

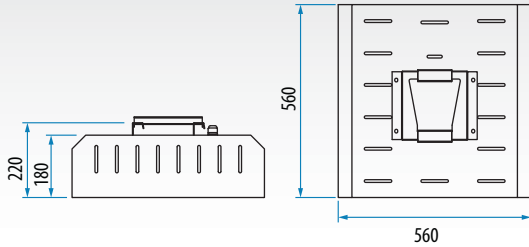


LF-XL/450W/50/EL/UNV/HB


## Photometric / IES

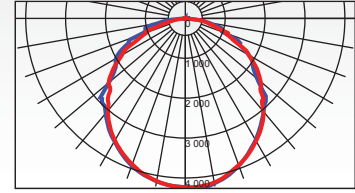

Lamp=12 134 lm  
Max=4 255.2 cd  
Power=152 W

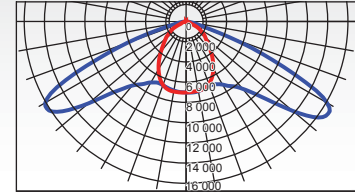

Lamp=26 702.1 lm  
Max=16 745.6 cd  
Power=310 W

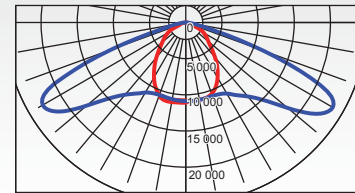

Lamp=43 057 lm  
Max=23 461.2 cd  
Power=0 W

How our Model No. Works:

## Ordering Information

LF	XL	150W	50	EL	UNV	HB	01	65	BK	XX
LED Fixture	Family	Wattage	Colour Temperature	Beam Angle	Voltage	Fixture Style	Mounting Options	Ingress Protection	Body Finish	Dimmable
		50W 150W 200W 300W 450W	50 - 5000K 27 - 50K optional (MTO)	RL - 120° Standard RS - 45° Optional EL - 85°x135° Optional	UNV - 120-277VAC	HB - High Bay	01 - Hanging Ring 02 - Universal Hanging Bracket 03 - Ceiling Surface Mount 04 - 1/2" NPT Conduit Thread	IP65 - Standard IP67 - (MTO)	BK - Black Standard XX - Others Finishes (MTO)	Blank - Undimmable 02 - Dimmable (MTO)

## Project Details:

Project Name:  
Fixture Type:  
Distributor:  
PO:

## Distributed by:



TO ORDER PLEASE CALL 1-877-736-0447 OR EMAIL: SALES@TUROLIGHT.COM

Tel: (416) 736-0447 • Toll Free: 1 (877) 736-0447 • Fax: (416) 736-4890 • Email: info@turolight.com • Website: www.turolight.com