

### Key Features

- Square welded aluminum housing with powder coated finish for corrosion resistance
- Flat toughened glass lens (70W, 80W, 100W) & UV-proof and heat resistant PC lens (250W, 300W)
- Aluminum reflector with vacuum coating for good lighting distribution
- Ballast is built in the fixture to have an integrated structure (70W, 80W, 100W)
- Split compartment of lamp and ballast for long lifetime (250W, 300W)

### Electronic Features


- Round tubular induction lamp with high lumen efficiency and life span of 100,000hours
- Stable lumen output and high lumen maintenance
- CRI higher than 80 and IP rating 54
- High power factor (>0.95), flickering free operation with low ballast loss and constant output

### Applications

- Parking lots
- Plazas
- Shopping malls
- Tennis courts

Order Code	Model Number	Description	Lamp	Volts (V)	IP	Gear Box L xW xH (mm)	Lens	G.W. (kg)	Initial Lumens	UL cUL	CSA
3886111	ID-PL-C70	70W Ind.Shoe Box,5000K&Blst	C70L	120-277	54	590X440X215	Glass	7.00	4900	Yes	No
3886112	ID-PL-C80	80W Ind.Shoe Box,5000K&Blst	C80L	120-277	54	590X440X215	Glass	7.00	6000	Yes	No
3886113	ID-PL-C100	100W Ind.Shoe Box,5000K&Blst	C100L	120-277	54	590X440X215	Glass	7.00	7500	Yes	No
3887537	ID-PL-C250-ACR	250W Ind.Shoe Box,5000K&Blst	C250L	120-277	54	850X600X305	PC	14.00	20000	Yes	No
3888102	ID-PL-C300-ACR	300W Ind.Shoe Box,5000K&Blst	C300L	120-277	54	850X600X305	PC	14.00	24000	Yes	No

\*CCT(K) 5000K, Ambient Temp: -20 ~ +40, Square Pole Pole Installation, Average Life 100,000 hours.

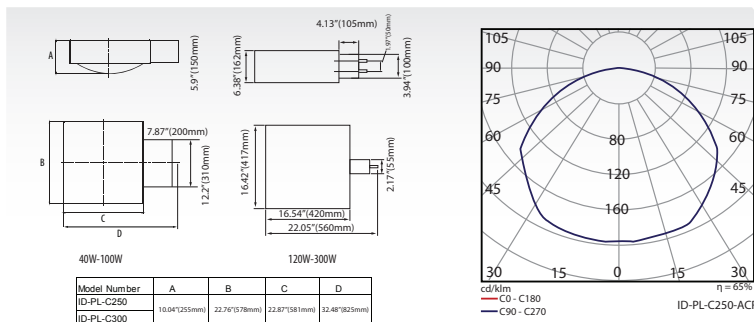

Distributed by: