



5W
Replace **60W**



Key Features

- 5W/400 Lumens
- Higher C.B.C.P
- 60W halogen replacement
- Dimmable
- High CRI (80+)
- 25,000 hour average life
- Suitable for dry and damp location
- Reduces energy consumption up to 80%
- No UV, infrared and mercury free

Other information

- Operating temperature range between -20°C and +50°C
- Suitable for dimmers or in luminaires controlled by dimmer switch
- UL/cUL listed, FCC compliant, RoHS compliant
- 3-year limited warranty in commercial use from the date of purchase

Applications


- Hospitality
- Retail
- Shopping Malls
- Offices
- Art galleries and museums
- Restaurants
- Residential

General Usage

- Track Lights
- Specialty
- Recessed Down Lights/Pot Lights
- Display Cases
- Under Cabinet Lights

Order Code	Model Number	Watts	Base	Volts	Hour Rating	Beam Angle	Initial Lumens	CCT (K)	CRI	C.B.C.P	M.O.L. (inch)	Case Qty.
1731201	PV-MR16/5W/30/WFL40/GU10/D	5	GU10	120	25,000	40°	400	3000	80	865	2.10	10/100
1731200	PV-MR16/5W/30/WFL40/JDR/D	5	E26	120	25,000	40°	400	3000	80	843	2.91	10/100

Dimensions

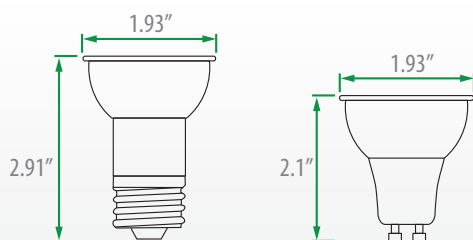

How to read:

PV - MR16 / 5W / 30 / WFL40 / GU10 / D
 LED Class | Lamp Type | Wattage | CCT(K) | Beam Angle | Base Type | Dimmable

Distributed by: