



### Key Features

- Direct replacement for T8 fluorescent Linear & U-Bend lamp
- 42W with 4500lm 8ft  
13W with 1900lm 2ft
- DLC Listed
- 50,000 hour average life
- High CRI (83+)
- Excellent distribution with 180° beam angle
- No UV, no infrared and mercury free
- Instant on, no flicker or buzz
- Fits into existing linear fixtures
- Compatible with most Instant Start Ballast & Rapid Start Ballast\*

\* Check the ballast compatible list on our website [www.turolight.com](http://www.turolight.com)

### Other information

- Operating temperature range between -20°C and +45°C
- UL/cUL listed, RoHS compliant
- 5-year limited warranty for DLC approved lamps / 3-year limited warranty for non-DLC in commercial and residential use (not recommended to use with ballast 7 years or older)




### Applications

- Offices
- Hospitality
- Retail
- Shopping Malls
- Restaurants


### General Usage

- Ideal replacement of Fluorescent T8 tubes



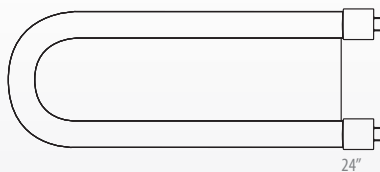

### Dimensions



24"



96"

Order Code	Model Number	Description	DLC	Lamp Power	Sys. Power	Base	Voltage (V)	Init. Lum.	Beam Angle	CCT (K)	CRI	MOL (in)	CS Qty
<b>Linear Tubes</b>													
1765200	VIV-T8DF/42W/30/F	T8 Direct Fit 8ft 42W G13 30K Frost	-	38	42	Single Bin	120-277,347	4150	180°	3000	≥83	96	20
1765300	VIV-T8DF/42W/35/F	T8 Direct Fit 8ft 42W G13 35K Frost	-	38	42	Single Bin	120-277,347	4250	180°	3500	≥83	96	20
1765400	VIV-T8DF/42W/40/F	T8 Direct Fit 8ft 42W G13 40K Frost	-	38	42	Single Bin	120-277,347	4350	180°	4000	≥83	96	20
1765500	VIV-T8DF/42W/50/F	T8 Direct Fit 8ft 42W G13 50K Frost	-	38	42	Single Bin	120-277,347	4500	180°	5000	≥83	96	20
<b>U-Bend Tubes</b>													
1763218	VIV-T8DF/U/20W/30/F	T8 Direct Fit U-Bend 20W G13 30K Frost	-	17	20	G13	120-277,347	2000	180°	3000	≥83	24	24
1763301	VIV-T8DF/U/20W/35/F	T8 Direct Fit U-Bend 20W G13 35K Frost	-	17	20	G13	120-277,347	2050	180°	3500	≥83	24	24
1763417	VIV-T8DF/U/20W/40/F	T8 Direct Fit U-Bend 20W G13 40K Frost	-	17	20	G13	120-277,347	2100	180°	4000	≥83	24	24
1763502	VIV-T8DF/U/20W/50/F	T8 Direct Fit U-Bend 20W G13 50K Frost	-	17	20	G13	120-277,347	2200	180°	5000	≥83	24	24
1762783	VIV-T8DF4/U/13W/30/F	T8 Direct Fit U-Bend 13W G13 30K Frost DLC		13	16	G13	120-277,347	1800	180°	3000	≥83	24	24
1762363	VIV-T8DF4/U/13W/35/F	T8 Direct Fit U-Bend 13W G13 35K Frost DLC		13	16	G13	120-277,347	1800	180°	3500	≥83	24	24
1762865	VIV-T8DF4/U/13W/40/F	T8 Direct Fit U-Bend 13W G13 40K Frost DLC		13	16	G13	120-277,347	1850	180°	4000	≥83	24	24
1762540	VIV-T8DF4/U/13W/50/F	T8 Direct Fit U-Bend 13W G13 50K Frost DLC		13	16	G13	120-277,347	1900	180°	5000	≥83	24	24

For the latest stock status please refer to your price list or send us an email at [sales@turolight.com](mailto:sales@turolight.com)

How to read: 

VIV	/	T8		/	DF		/	U		/	13W		/	40		/	F
																	

PLEASE CONSULT OUR LIST OF COMPATIBLE BALLASTS: ([HTTP://WWW.TUROLIGHT.COM/DCL](http://www.turolight.com/dcl))  
WE RECOMMEND CHECKING THE BRAND AND AGE OF THE EXISTING BALLAST BEFORE INSTALLATION.  
SHUNTED SOCKETS MUST BE USED.

Distributed by: