



Turolight's comprehensive line of TUFF™ T5 high-efficiency linear tubes represent the latest advancements in energy efficient fluorescent technology. We've managed to create an incredibly reliable line of T5 tubes boasting longevity, quality and efficiency all-the-while reducing the up-front purchase price.



“ MOST ADVANCED FLUORESCENTS YET

Select from F14 high efficiency lamps to the ever popular F54 High Output lamps. Turolight endeavours to keep all wattages and sizes in stock and available for your next project.

Key Features

- **5000 Lumens**
- **94% Lumen maintenance**
- **High lumen output and efficiency**
- Lower maintenance cost
- Full range of various wattage and color temperature
- High CRI (82+)
- 36,000 hour average life*
- Reduces energy consumption up to 20%
- Shatterproof available

*With Programmed Start Ballast (12 hour start).

Applications

- Office buildings
- Industrial units
- Warehouses
- Shopping malls
- Garages
- Cabinets
- Residential
- Condominiums
- Schools
- Hospitals
- Hotels
- Supermarkets

Other information

- Operating temperature range between -20°C and +40°C
- UL/cUL listed, FCC compliant
- Available in these color temperatures: 3000K, 3500K, 4100K, 5000K, and 6500K**
- 2-year limited warranty in commercial and residential use

General Usage

- Ceiling Fixtures
- Signage
- Cove Lighting

Order Code	Model Number	Watts	Base	Hour Rating†		Initial Lumens	CCT (K)	CRI	M.O.L. (inch)	Qty.
				(3 hour start)	(12 hour start)					
TUFF™ T5 - High Output										
1364204	TUFF-F24T5/830/HO	24	Min Bi Pin / G5	30,000	36,000	2000	3000K	82	22.2	40
1364304	TUFF-F24T5/835/HO	24	Min Bi Pin / G5	30,000	36,000	2000	3500K	82	22.2	40
1364404	TUFF-F24T5/841/HO	24	Min Bi Pin / G5	30,000	36,000	2000	4100K	82	22.2	40
1364504	TUFF-F24T5/850/HO	24	Min Bi Pin / G5	30,000	36,000	1900	5000K	82	22.2	40
1364605	TUFF-F24T5/865/HO	24	Min Bi Pin / G5	30,000	36,000	1900	6500K	82	22.2	40
1365201	TUFF-F39T5/830/HO	39	Min Bi Pin / G5	30,000	36,000	3500	3000K	82	34.0	40
1365301	TUFF-F39T5/835/HO	39	Min Bi Pin / G5	30,000	36,000	3500	3500K	82	34.0	40
1365401	TUFF-F39T5/841/HO	39	Min Bi Pin / G5	30,000	36,000	3500	4100K	82	34.0	40
1365501	TUFF-F39T5/850/HO	39	Min Bi Pin / G5	30,000	36,000	3350	5000K	82	34.0	40
1365601	TUFF-F39T5/865/HO	39	Min Bi Pin / G5	30,000	36,000	3350	6500K	82	34.0	40
1365202	TUFF-F49T5/830/HO	49	Min Bi Pin / G5	30,000	36,000	4800	3000K	82	45.8	40
1365302	TUFF-F49T5/835/HO	49	Min Bi Pin / G5	30,000	36,000	4800	3500K	82	45.8	40
1365402	TUFF-F49T5/841/HO	49	Min Bi Pin / G5	30,000	36,000	4800	4100K	82	45.8	40
1365502	TUFF-F49T5/850/HO	49	Min Bi Pin / G5	30,000	36,000	4600	5000K	82	45.8	40
1365602	TUFF-F49T5/865/HO	49	Min Bi Pin / G5	30,000	36,000	4600	6500K	82	45.8	40
1365200	TUFF-F54T5/830/HO	54	Min Bi Pin / G5	30,000	36,000	5000	3000K	82	45.8	40
1365300	TUFF-F54T5/835/HO	54	Min Bi Pin / G5	30,000	36,000	5000	3500K	82	45.8	40
1365400	TUFF-F54T5/841/HO	54	Min Bi Pin / G5	30,000	36,000	5000	4100K	82	45.8	40
1365500	TUFF-F54T5/850/HO	54	Min Bi Pin / G5	30,000	36,000	4800	5000K	82	45.8	40
1365600	TUFF-F54T5/865/HO	54	Min Bi Pin / G5	30,000	36,000	4800	6500K	82	45.8	40
TUFF™ T5 - High Efficiency										
1362200	TUFF-F14T5/830/HE	14	Min Bi Pin / G5	30,000	36,000	1140	3000K	82	22.2	40
1362300	TUFF-F14T5/835/HE	14	Min Bi Pin / G5	30,000	36,000	1140	3500K	82	22.2	40
1362400	TUFF-F14T5/841/HE	14	Min Bi Pin / G5	30,000	36,000	1140	4100K	82	22.2	40
1362500	TUFF-F14T5/850/HE	14	Min Bi Pin / G5	30,000	36,000	1045	5000K	82	22.2	40
1362600	TUFF-F14T5/865/HE	14	Min Bi Pin / G5	30,000	36,000	1045	6500K	82	22.2	40
1364205	TUFF-F21T5/830/HE	21	Min Bi Pin / G5	30,000	36,000	1850	3000K	82	34.0	40
1364305	TUFF-F21T5/835/HE	21	Min Bi Pin / G5	30,000	36,000	1850	3500K	82	34.0	40
1364405	TUFF-F21T5/841/HE	21	Min Bi Pin / G5	30,000	36,000	1850	4100K	82	34.0	40
1364505	TUFF-F21T5/850/HE	21	Min Bi Pin / G5	30,000	36,000	1660	5000K	82	34.0	40
1364606	TUFF-F21T5/865/HE	21	Min Bi Pin / G5	30,000	36,000	1660	6500K	82	34.0	40
1364206	TUFF-F28T5/830/HE	28	Min Bi Pin / G5	30,000	36,000	2650	3000K	82	45.8	40
1364306	TUFF-F28T5/835/HE	28	Min Bi Pin / G5	30,000	36,000	2650	3500K	82	45.8	40
1364406	TUFF-F28T5/841/HE	28	Min Bi Pin / G5	30,000	36,000	2650	4100K	82	45.8	40
1364506	TUFF-F28T5/850/HE	28	Min Bi Pin / G5	30,000	36,000	2600	5000K	82	45.8	40
1364607	TUFF-F28T5/865/HE	28	Min Bi Pin / G5	30,000	36,000	2600	6500K	82	45.8	40
TUFF™ T5 - High Output Shatter-Proof										
1365404	TUFF-F54T5/841/HO/TC	54	Min Bi Pin / G5	30,000	36,000	5000	4100K	82	45.8	40
1365504	TUFF-F54T5/850/HO/TC	54	Min Bi Pin / G5	30,000	36,000	4800	5000K	82	45.8	40

Meet Turolight T5 Recessed Office Fixture


- **High efficiency**
 - Over 50% energy savings
 - No strike or re-strike delay
 - Easy installation
- **Low glare**



CALL FOR MORE DETAILS!

How to read: TUFF - F54T5 / 8 50 / HO
Lamp Class Type CRI CCT(K) High Output

Distributed by:

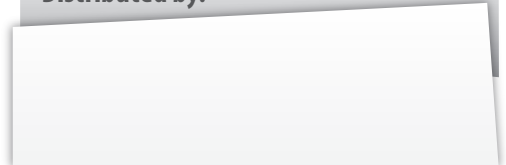

TO ORDER PLEASE CALL 1-877-736-0447 OR EMAIL: SALES@TUROLIGHT.COM

Tel: (416) 736-0447 • Toll Free: 1 (877) 736-0447 • Fax: (416) 736-4890 • Email: info@turolight.com • Website: www.turolight.com