

LED LAMP

ARTISAN



A19, B10, ST19, T9 **LOW non visible FLICKER**




Features & Benefits

- Reduced flicker down to 10%
- Compare to 6.6% traditional incandescent
 - Far below California T20 standard 30%
 - Significantly improve light quality
 - Optimize eye comfort

- With clear, amber or milky white glass cover
- Dimmable, High CRI (80+)
- 15,000 hour average life span
- Rated for damp locations

Dimensional drawing

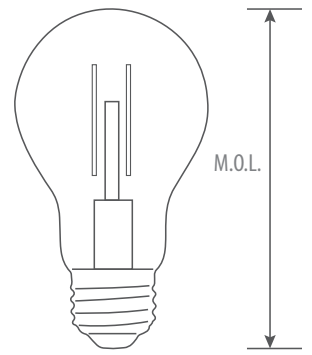

Warranty & Cautions

2-year limited warranty

Operating temperature range between -20°C and +40°C

Ordering Information

Example: AR-A19LF/8W/30/D/MW

LED CLASS	LAMP TYPE	WATTAGE	CCT(K)	BASE	DIMMABLE	COVER
AR (Artisan)	A15LF, A19LF B10LF ST19LF T6LF, T9LF, T14LF G16.5LF	8W 5W 4W 2.5W	40 (4000K) 30 (3000K) 27 (2700K) 22 (2200K)	E12 (E12) Blank (E26)	D (dimmable)	C (Clear) A (Amber) MW (Milky White)

Product Specification

Ordering Code	Model Number	Product Description	Watts (W)	Replacement Filament	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens (lm)	CCT(K)	CRI	Damp LOC.	M.O.L. (inch)	Case QTY.
1771209	AR-A15LF/5W/30/D/C	A15 Low Flicker 5W 30K Dimmable Clear	5	-	40W	E26	120	15,000	330°	500	3000	80	Y	3.54	40
1771210	AR-A15LF/5W/30/D/F	A15 Low Flicker 5W 30K Dimmable Frost	5	-	40W	E26	120	15,000	330°	450	3000	80	Y	3.54	40
1772110	AR-A19LF/8W/27/D/C	A19 Low Flicker 8W 27K Dimmable Clear	8	-	60W	E26	120	15,000	330°	800	2700	80	Y	4.29	40
1772202	AR-A19LF/8W/30/D/C	A19 Low Flicker 8W 30K Dimmable Clear	8	-	60W	E26	120	15,000	330°	800	3000	80	Y	4.29	40
1772205	AR-A19LF/8W/30/D/MW	A19 Low Flicker 8W 30K Dimmable Milky white	8	-	60W	E26	120	15,000	330°	750	3000	80	Y	4.29	40
1771141	AR-B10LF/4W/27/E12/D/C	B10 Low Flicker 4W 27K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	300	2700	80	Y	3.78	50
1771203	AR-B10LF/4W/30/E12/D/C	B10 Low Flicker 4W 30K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	300	3000	80	Y	3.78	50
1771211	AR-B10LF/4W/30/E12/D/MW	B10 Low Flicker 4W 30K E12 Dimmable Milky white	4	-	40W	E12	120	15,000	330°	280	3000	80	Y	3.78	50
1771403	AR-B10LF/4W/40/E12/D/C	B10 Low Flicker 4W 40K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	300	4000	80	Y	3.78	50
1771925	AR-B10LF/4W/22/E12/D/A	B10 Low Flicker 4W 22K E12 Dimmable Amber	4	40W	-	E12	120	15,000	330°	250	2200	80	Y	3.78	50
1771142	AR-B10LF/4W/27/D/C	B10 Low Flicker 4W 27K E26 Dimmable Clear	4	-	40W	E26	120	15,000	330°	300	2700	80	Y	3.78	50
1772111	AR-ST19LF/5W/27/D/C	ST19 Low Flicker 5W 27K Dimmable Clear	5	-	60W	E26	120	15,000	330°	500	2700	80	Y	5.39	20
1772203	AR-ST19LF/5W/30/D/C	ST19 Low Flicker 5W 30K Dimmable Clear	5	-	60W	E26	120	15,000	330°	500	3000	80	Y	5.39	20
1771404	AR-ST19LF/5W/40/D/C	ST19 Low Flicker 5W 40K Dimmable Clear	5	-	60W	E26	120	15,000	330°	500	4000	80	Y	5.39	20
1772908	AR-ST19LF/5W/22/D/A	ST19 Low Flicker 5W 22K Dimmable Amber	5	60W	-	E26	120	15,000	330°	400	2200	80	Y	5.39	20
1771205	AR-T6LF/2.5W/30/E12/D/C	T6 Low Flicker 2.5W 30K E12 Dimmable Clear	2.5	-	25W	E12	120	15,000	330°	200	3000	80	Y	3.84	50
1771140	AR-T9LF/4W/27/D/C	T9 Low Flicker 4W 27K Dimmable Clear	4	-	40W	E26	120	15,000	330°	350	2700	80	Y	5.71	50
1771206	AR-T9LF/4W/30/D/C	T9 Low Flicker 4W 30K Dimmable Clear	4	-	40W	E26	120	15,000	330°	350	3000	80	Y	5.71	50
1771207	AR-T14LF/5W/30/D/C	T14 Low Flicker 5W 30K Dimmable Clear	5	-	60W	E26	120	15,000	330°	500	3000	80	Y	4.15	50
1771146	AR-G16.5LF/4W/27/E12/D/C	G16.5 Low Flicker 4W 27K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	350	2700	80	Y	3.31	50
1771208	AR-G16.5LF/4W/30/E12/D/C	G16.5 Low Flicker 4W 30K E12 Dimmable Clear	4	-	40W	E12	120	15,000	330°	350	3000	80	Y	3.31	50
1771212	AR-G16.5LF/4W/30/E12/D/MW	G16.5 Low Flicker 4W 30K E12 Dimmable Milky white	4	-	40W	E12	120	15,000	330°	300	3000	80	Y	3.31	50