

LED LAMP

VIVID Series



VIV-MR16



Features & Benefits

Energy Star listed

7W/6.5W replaces 50W/40W incandescent

High CRI (80+), dimmable

25,000 hour average life

Damp location approved

Warranty & Cautions

3-year limited warranty


Operating temperature range between -20°C and +45°C

Ordering Information

Example: VIV-MR16/6.5W/27/WFL35/JDR/S/D

LED CLASS	LAMP TYPE	WATTAGE	CCT(K)	BEAM ANGLE	BASE	NECK LENGTH	DIMMABLE
VIV (Vivid)	MR16 MR16/T3	7W 6W, 6.5W	50 (5000K) 40 (4000K) 30 (3000K) 27 (2700K)	WFL40 (40°) WFL35 (35°) FL25 (25°)	JDR (E26) GU10 GU5.3	L (Long) S (Short)	D (dimmable) Blank (non dimmable)

Dimensional drawing

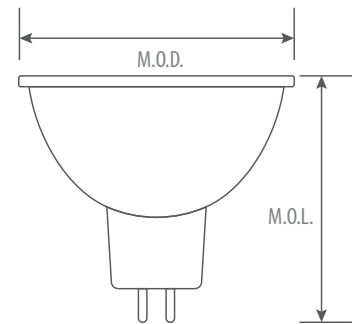

Product Specification

Ordering Code	ES	Model Number	Watts	Replacement Incandescent	Base	Voltage (V)	Hour Rating	Beam Angle	Initial Lumens(lm)	CCT(K)	CRI	C.B.C.P	Enclosed Fixture Application	Damp LOC.	M.O.D. (inch)	M.O.L. (inch)	Case QTY.
1752202	Y	VIV-MR16/T3/7W/30/WFL40/GU5.3/D	7	50W	GU5.3	12	25,000	40°	500	3000	80	1251	-	Y	1.97	1.8	100
1752402	-	VIV-MR16/T3/7W/40/WFL40/GU5.3/D	7	50W	GU5.3	12	25,000	40°	500	4000	80	1251	-	Y	1.97	1.8	100
1752203	Y	VIV-MR16/T3/6W/30/WFL40/GU10/D	6	40W	GU10	120	25,000	40°	455	3000	83	1442	-	Y	1.89	2.05	50
1762013	Y	VIV-MR16/6.5W/27/FL25/GU10/D	6.5	40W	GU10	120	25,000	25°	480	2700	80	1442	-	Y	1.97	2.17	50
1762787	Y	VIV-MR16/6.5W/30/FL25/GU10/D	6.5	40W	GU10	120	25,000	25°	480	3000	80	1442	-	Y	1.97	2.17	50
1762870	Y	VIV-MR16/6.5W/40/FL25/GU10/D	6.5	40W	GU10	120	25,000	25°	480	4000	80	1495	-	Y	1.97	2.17	50
1762014	Y	VIV-MR16/6.5W/27/WFL35/GU10/D	6.5	40W	GU10	120	25,000	35°	480	2700	80	1080	-	Y	1.97	2.17	50
1762788	Y	VIV-MR16/6.5W/30/WFL35/GU10/D	6.5	40W	GU10	120	25,000	35°	480	3000	80	1080	-	Y	1.97	2.17	50
1762871	Y	VIV-MR16/6.5W/40/WFL35/GU10/D	6.5	40W	GU10	120	25,000	35°	480	4000	80	1168	-	Y	1.97	2.17	50
1762009	N	VIV-MR16/6.5W/27/FL25/JDR/S/D	6.5	40W	E26	120	25,000	25°	500	2700	80	1495	-	Y	1.97	2.28	50
1762789	N	VIV-MR16/6.5W/30/FL25/JDR/S/D	6.5	40W	E26	120	25,000	25°	500	3000	80	1495	-	Y	1.97	2.28	50
1762872	N	VIV-MR16/6.5W/40/FL25/JDR/S/D	6.5	40W	E26	120	25,000	25°	500	4000	80	1495	-	Y	1.97	2.28	50
1762010	N	VIV-MR16/6.5W/27/WFL35/JDR/S/D	6.5	40W	E26	120	25,000	35°	500	2700	80	1080	-	Y	1.97	2.28	50
1762790	N	VIV-MR16/6.5W/30/WFL35/JDR/S/D	6.5	40W	E26	120	25,000	35°	500	3000	80	1080	-	Y	1.97	2.28	50
1762873	N	VIV-MR16/6.5W/40/WFL35/JDR/S/D	6.5	40W	E26	120	25,000	35°	500	4000	80	1080	-	Y	1.97	2.28	50
1762544	N	VIV-MR16/6.5W/50/WFL35/JDR/S/D	6.5	40W	E26	120	25,000	35°	500	5000	80	1080	-	Y	1.97	2.28	50
1762011	Y	VIV-MR16/6.5W/27/FL25/JDR/L/D	6.5	40W	E26	120	25,000	25°	480	2700	80	1442	-	Y	1.97	2.84	50
1762791	Y	VIV-MR16/6.5W/30/FL25/JDR/L/D	6.5	40W	E26	120	25,000	25°	480	3000	80	1442	-	Y	1.97	2.84	50
1762874	Y	VIV-MR16/6.5W/40/FL25/JDR/L/D	6.5	40W	E26	120	25,000	25°	480	4000	80	1495	-	Y	1.97	2.84	50
1762012	Y	VIV-MR16/6.5W/27/WFL35/JDR/L/D	6.5	40W	E26	120	25,000	35°	480	2700	80	1080	-	Y	1.97	2.84	50
1762792	Y	VIV-MR16/6.5W/30/WFL35/JDR/L/D	6.5	40W	E26	120	25,000	35°	480	3000	80	1080	-	Y	1.97	2.84	50
1762875	Y	VIV-MR16/6.5W/40/WFL35/JDR/L/D	6.5	40W	E26	120	25,000	35°	480	4000	80	1168	-	Y	1.97	2.84	50