

LED Slim Panel



PRO-SP5	Segment	Wattage Range	Lumen Range
	Commercial & Residential	8W	750lm

Features

- Ultra Slim Profile Aluminum Edgelit downlighter suitable for Low depth installation.
- Wet Location rated with operating temperature range of -20 °C ~ + 40 °C.
- Field Selectable CCT (3000K, 4000K & 5000K)
- Efficacy of ≥ 93 lm/W with ≥ 80 CRI.
- FT4 Cable
- IC-rated for direct contact with insulation.

Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

Premium Grade PC Diffuser in Opal Color

Mounting:

Recessed Mounting with Spring Clamps.

Driver:


120V LED driver with Operating temperature range of -20 °C ~ +40 °C

LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 93 lm/w.

Controls:

TRIAC Dimming

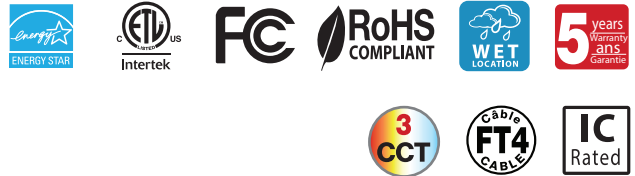


Dimensional Drawing

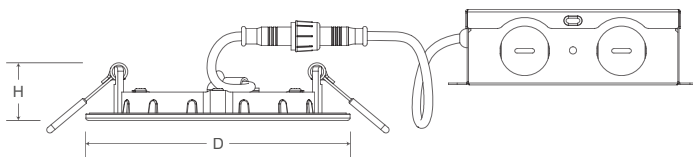

	D	Cut-out	H
SP5/4 (4")	4.92"	4.25"	0.96"

Polar Candela

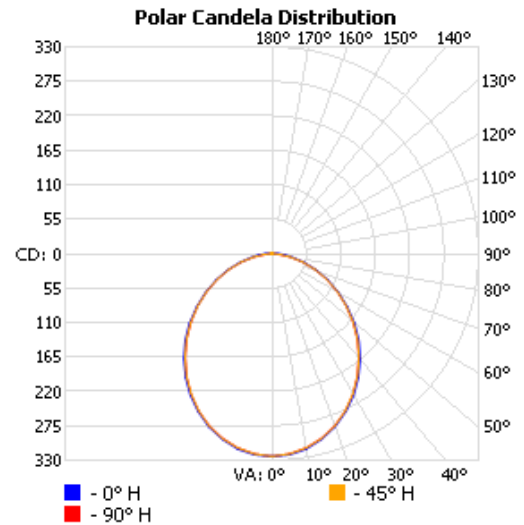

Applications



Offices



Malls



Hotels



Residences

LED Slim Panel



PRO-SP5	Segment	Wattage Range	Lumen Range
	Commercial & Residential	8W	750lm

Ordering Information Example: PRO-SP5/4/8W/MK/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable
PRO	SP5 (Slim panel)	4 (4")	8W	MK (Multiple CCT, 30-40-50K)	120 (120V)	WH (White)	D (TRIAC Dimming)

Product Information

Ordering Code	Energy Star	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Wet Location	Dimension D×H (inch)	Case QTY.
3662164	Yes	PRO-SP5/4/8W/MK/120/WH/D	8	120	25,000	750	30-40-50K	≥80	120°	Yes	4.92" × 0.96"	50
3660094	-	RGD-SP/4/CCT/BK	4" slim panel, black trim ring									
3660095	-	RGD-SP/4/CCT/BN	4" slim panel, brush nickel trim ring									

Accessories

RGD-SP/BK



RGD-SP/BN



Related Products



RGD-CDR



RGD-CHY2



RGD-JH



RGD-HS