

LED Wrap Around



DL-WA5T	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	20W-40W	2,600-5,200lm

Features

- Slim Design Linear Wrap in 2Ft and 4Ft length.
- Field Selectable (CCT 3500K, 4000K & 5000K) with Efficacy ≥ 130 lm/w.
- Auto-sensing 120-347 V LED driver with Operating temperature range of $-20^{\circ}\text{C} \sim +45^{\circ}\text{C}$
- CRI 80 with 0.9PF

Specifications

Housing:

Slim Profile CRCA Housing with Polycarbonate End Caps.

Optics:

Opal Colour PMMA Diffuser

Mounting:

Suitable for Surface & Pendant Mounting

Driver:

Auto-sensing 120-347 V LED driver with Operating temperature range of $-20^{\circ}\text{C} \sim +45^{\circ}\text{C}$


LED:

Field Selectable CCT of 3500K, 4000K & 5000K. Efficacy of ≥ 130 lm/w.

Controls:

Compatible with 0-10V Dimming


Dimensional Drawing

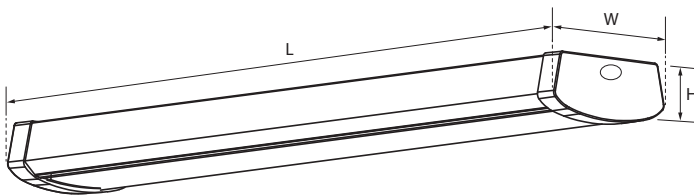

	L	W	H
WA5T/2F	24"	5.3"	2.14"
WA5T/4F	48"	5.3"	2.14"



Polar Candela

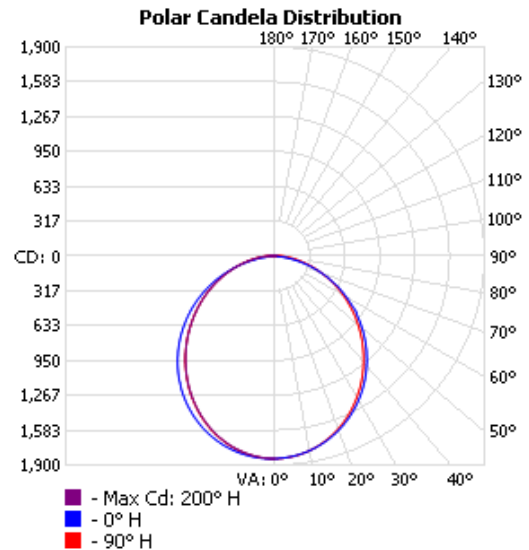

Applications



Malls



Hotels



Factories

LED Wrap Around



DL-WA5T	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	20W-40W	2,600-5,200lm

Ordering Information Example: DL-WA5T/2F/20W/MK/120-347V/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Dimmable
DL (Deltalum)	WAST (LED Wrap Around)	2F (2') 4F (4')	20W 40W	MK (Selectable Kelvin/ CCT)	120-347V	D (Dimmable)

Product Information

Ordering Code	DLC / DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	Beam Angle	CRI	Damp Location	Case QTY.
3682206	Y	DL-WA5T/2F/20W/MK/120-347V/D	20	120-347V	50,000	2600	35-40-50	100°	≥80	Yes	6
3682207	Y Premium	DL-WA5T/4F/40W/MK/120-347V/D	40	120-347V	50,000	5200	35-40-50	100°	≥80	Yes	6
3660247	-	DL-WA5T/2F/LENS	2ft Replacement PMMA Lens								
3660248	-	DL-WA5T/4F/LENS	4ft Replacement PMMA Lens								

Related Products



DL-EC2



DL-VT2



SSL-XHC2



RGD-BLP6