

# LED LAMP

**VIVID Series**



## LED T8 TUBE Ballast Bypass, Nano-Freezer / Cooler

Design for freezer/cooler application



5-year limited warranty

Operating temperature range -30 °C ~ +45 °C



### Features & Benefits

High-transmittance nano-plastic tube, Shatterproof, no bending under high temperature

Humidity tolerance 95%, suitable for refrigerator and cooler

Plugs directly into AC outlet, instant startup

Optional 6' power and joiner cables available. See below for ordering guide.


ETL sanitation certificate (equal to NSF certificate for food equipment)

48", 60" and 72" length

50,000 hour life (L70), high CRI (83+)

Damp location rated

### Dimensional Drawing

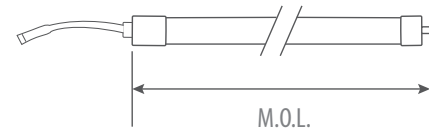

### Ordering Information Example: VIV-T8BPSP/N/18W/40/F/FC


Family Name	Lamp Type	Material	Wattage	CCT	Frost	Application
VIV (Vivid)	T8BPSP (Bypass, shatterproof)	N (Nano)	18W 22W 26W	40 (4000K)	F (Frost)	FC (Freezer / Cooler)

### Product Specification


Ordering Code	Model Number	Description	Lamp Power (W)	System Power (W)	Initial Lumen (lm)	Voltage (V)	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
1753400	VIV-T8BPSP/N/18W/40/F/FC (4FT)	Bypass nano 4ft 18W G13 40K frost shatterproof freezer/cooler	18	18	2250	120-277	50,000	160	4000	83	48"	10
1754400	VIV-T8BPSP/N/22W/40/F/FC/5FT	Bypass nano 5ft 22W G13 40K frost shatterproof freezer/cooler	22	22	2750	120-277	50,000	160	4000	83	60"	10
1754401	VIV-T8BPSP/N/26W/40/F/FC/6FT	Bypass nano 6ft 26W G13 40K frost shatterproof freezer/cooler	26	26	3250	120-277	50,000	160	4000	83	72"	10
3660376	VIV-T8/FC/6C	VIVID Freezer & Cooler 6' Power Cord										
3660377	VIV-T8/FC/3J	VIVID Freezer & Cooler IP65 3' Connecting Line										
3660378	VIV-T8/FC/YJ	VIVID Freezer & Cooler IP65 "Y" Splice Line										
3660379	VIV-T8/FC/MTG	VIVID Freezer & Cooler Mounting Brackets (2/Pkg.)										



### Accessories



36" extension cord

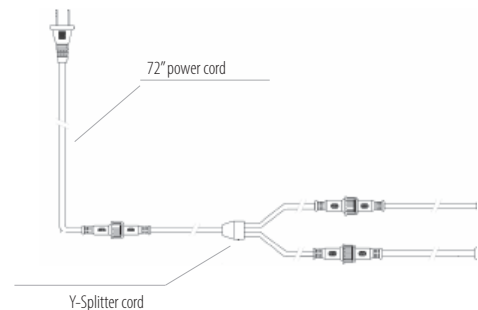

72" power cord

Y-Splitter cord