

LED Wall Pack Light



SSL-WP1TS	Segment	Wattage Range	Lumen Range
	Commercial & Residential	Selectable Wattage (30W-120W)	3,900-15,600lm

Features

- Aesthetically Designed Compact Wallpack with Glass diffuser for long life & trouble free operation.
- Wet Location rated with operating temperature range of -40°C - $+45^{\circ}\text{C}$.
- Field Selectable CCT 3000K, 4000K & 5000K
- Efficacy of ≥ 130 lm/W with ≥ 80 CRI.
- Integral Photocell included (on/off switchable)

Specifications

Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

Optics:

Prismatic UV Resistant Glass Lampshade

Mounting:

Surface Mounting

Driver:

120-347 V Auto Sensing driver with Operating temperature range of -40°C - $+45^{\circ}\text{C}$
Selectable Wattage 60M (60-40-30W) 120XL (120-100-80W)

LED:

Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of ≥ 130 lm/w.

Controls:


Compatible with 0-10V Dimming




Selectable wattage and CCT



Dimensional Drawing

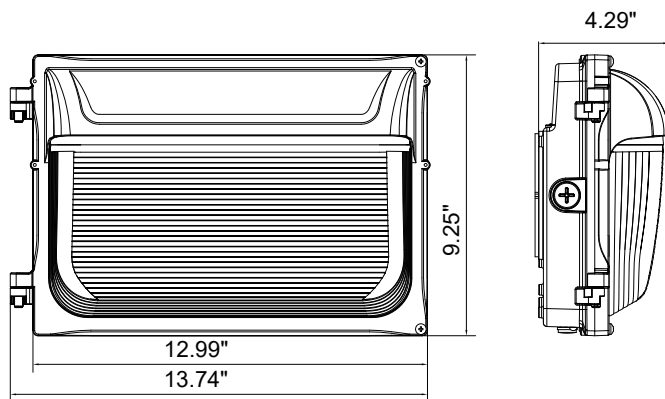

Polar Candela

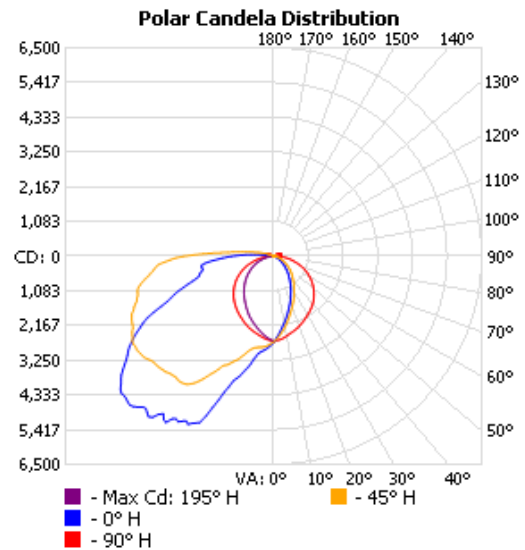

Applications



Malls



Hotels



Residences



Office Complex

LED Wall Pack Light



SSL-WP1TS	Segment	Wattage Range	Lumen Range
	Commercial & Residential	Selectable Wattage (30W-120W)	3,900-15,600lm

Ordering Information Example: SSL-WP1TS/60M/MW/MK/120-347V/D/PC/BLK

Family Name	Fixture Type	Wattage	CCT	Voltage (V)	Dimmable	Photocell	Finish
SSL (Solid state lighting)	WP1TS (LED Wall Pack)	60M (Max. Wattage 60W) 120XL (Max. Wattage 120W)	MW (Selectable Wattage)	MK (Selectable Kelvin)	120-347V	D (0-10V dimming)	PC (Default) BLK (Black) WH (White)

Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage(V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Case QTY.
3680360	Yes	SSL-WP1TS/60M/MW/MK/120-347V/D/PC/BLK	60-40-30	120-347	50,000	7800- 5200- 3900	30-40-50	≥80	4
3680361	Yes	SSL-WP1TS/120XL/MW/MK/120-347V/D/PC/BLK	120-100-80	120-347	50,000	15600-13000-10400	30-40-50	≥80	4
3682257	Yes	SSL-WP1TS/120XL/MW/MK/120-347V/D/PC/WH	120-100-80	120-347	50,000	15600-13000-10400	30-40-50	≥80	4

Related Products



RGD-CDR



RGD-CHY2



PRO-SP5



RGD-HS