

LED FIXTURE

SSL Series




LED Sports Light SSL-SL3

Delivers volumetric lighting and reducing glare.



5-year limited warranty

Operating temperature range -40° C ~ +50° C

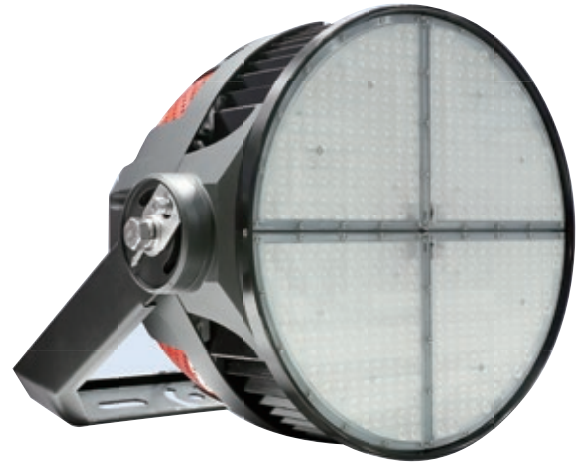

Features & Benefits

Wattage	300W-1000W
Input Voltage	120-347V
Power Frequency	50/60Hz
Power Factor	>0.90
Efficiency	150lm/W

Optical Data

LED Type	5050 LED
CCT	5000K
CRI	>70
Beam Angle	15°/25°/40°/60°/80°
Dimming	1-10V

cULus listed, DLC Premium, L70 @ 100000 Hrs


Black housing with Red accents, c/w Visor & "U" Bracket.

6KV surge protection, IP65 rated


1M cable black, cast Aluminium design

Dimensional Drawing

600M/MW

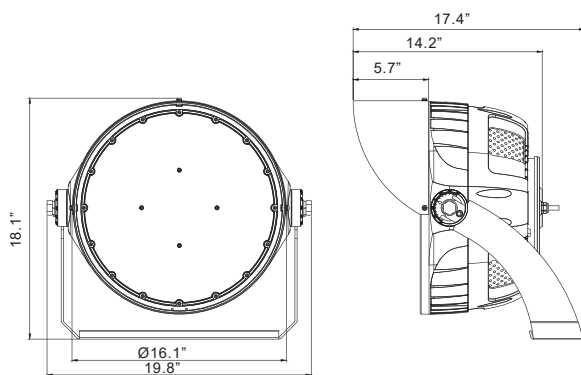

1000L/MW

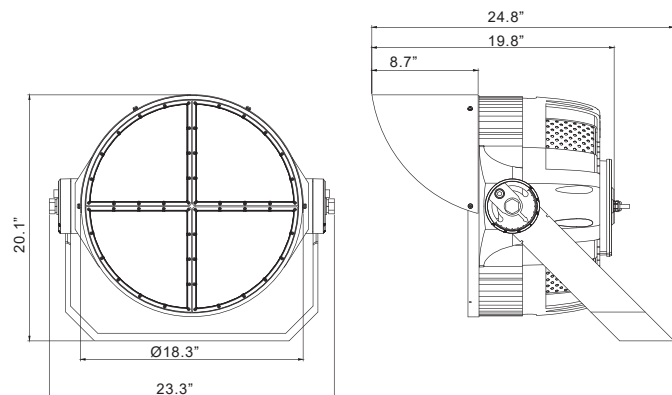

LED Sports Light SSL-SL3



Ordering Information Example: SSL-SL3/600M/MW/50K/120-347V/40D

Family Name	Lamp Type	Wattage	CCT	Voltage	Beam Angle
SSL(Solid State Lighting)	SL3 (Sports Light)	600M/MW (Max.600W, Selectable Wattage) 1000L/MW (Max.1000W, Selectable Wattage)	50K (5000K)	120-347V	40D (40°)


Product Specification

Ordering Code	DLC Premium	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	Optics / Distribution	CRI	Dimming	Dimension (inch)	Case QTY.
3682241	Yes	SSL-SL3/600M/MW/50K/120-347V/40D	600-500-400-300	120-347	100000	90000-75000-60000-45000	5000	25°/40°/60°, Default 40°	>70	1-10V	19.8 x 18.1 x 17.4	1
3682242	Yes	SSL-SL3/1000L/MW/50K/120-347V/40D	1000-900-800-700	120-347	100000	150000-135000-120000-10500	5000	15°/40°/60°/80°, Default 40°	>70	1-10V	19.8 x 18.1 x 17.4	1
3660259	-	SSL-SL2/SL3/LASER/SCOPE/L	Laser Scope for Aiming Sport Lighter.									
3660292	-	SSL-SL3/600M/LENS/25DEG	SSL-SL3/600M, 25 degree Lens									
3660293	-	SSL-SL3/600M/LENS/60DEG	SSL-SL3/600M, 60 degree Lens									
3660294	-	SSL-SL3/1000L/LENS/15DEG	SSL-SL3/1000L, 15 degree Lens									
3660295	-	SSL-SL3/1000L/LENS/60DEG	SSL-SL3/1000L, 60 degree Lens									
3660296	-	SSL-SL3/1000L/LENS/80DEG	SSL-SL3/1000L, 80 degree Lens									

LED Sports Light SSL-SL3


SSL-SL3/600M

Front

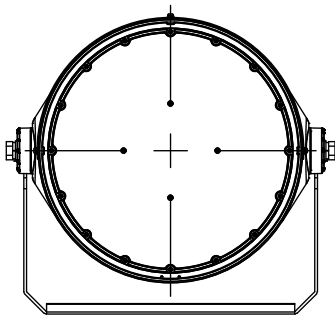


EPA=1.66ft²

Side

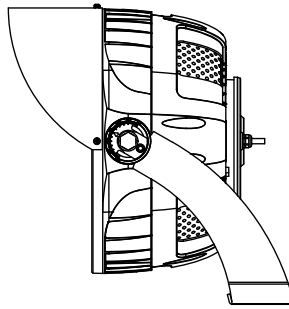

EPA=1.54ft²


45° Beam angle

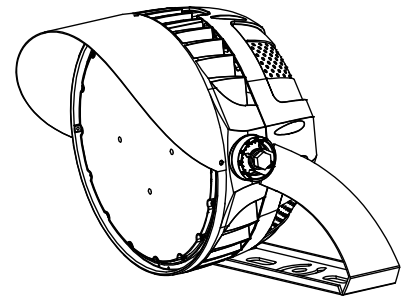

EPA=2.02ft²


SSL-SL3/1000L

Front




EPA=2.19ft²

Side

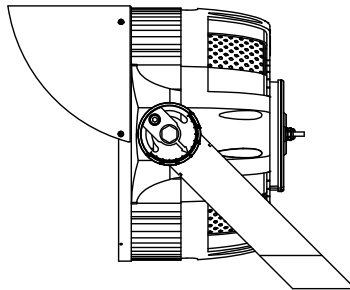

EPA=2.38ft²

45° Beam angle

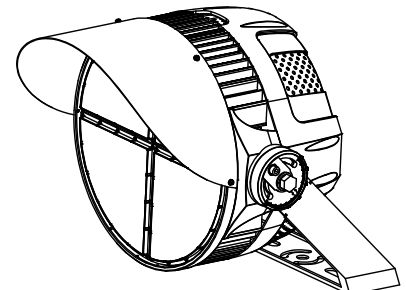

EPA=2.74ft²