

DeltaLum Shelf & Cabinet Lights



DL-SCL	Segment	Wattage Range	Lumen Range
	Commercial & Residential	Selectable Wattage (3-16W)	315-1,680lm

Features

- Multiple length options from 1' to 4' linear luminaires.
- Field Selectable dual wattage per luminaire with Selectable 3CCT (30-40-50K).
- IP 20, Operating Temperature -25 °C ~ +45 °C.
- Luminaire may be joined together for linkable runs c/w 11" jumper cable if desired and end cap.
- Optional mounting hardware supplied allows for surface or side mount applications, c/w 61" white power cable with molded 2 prong plug.
- Separate Hardwire Box with on/off switching allows for excellent wire management.
- Total power of all linked fixtures should not exceed 180W.

Specifications

Housing:

White post painted steel housing in 1', 2', 3' and 4' lengths

Optics:

Smooth extruded Frosted Lens, 120 Degree Beam Angle.

Mounting:

Surface or Side mount clips supplied, with 61" white power cord molded 2 prong plug, 11" jumper cable and End Cap.

Driver:


120V, 50/60Hz

Controls:

Dual wattage selectable located on the side of the luminaire.
3 CCT Selectable (30-40-50K) located on side of the Luminaire.




Dimensional Drawing

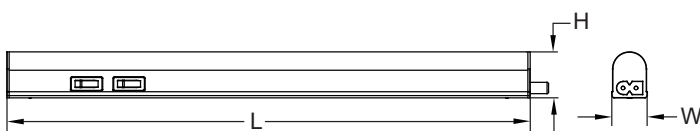

	L	W	H
DL-SCL/1F (1ft)	12.32"	0.91"	1.18"
DL-SCL/2FS (2ft)	21.38"	0.91"	1.18"
DL-SCL/2FL (2ft)	22.56"	0.91"	1.18"
DL-SCL/3F (3ft)	34.37"	0.91"	1.18"
DL-SCL/4F (4ft)	46.18"	0.91"	1.18"

Polar Candela

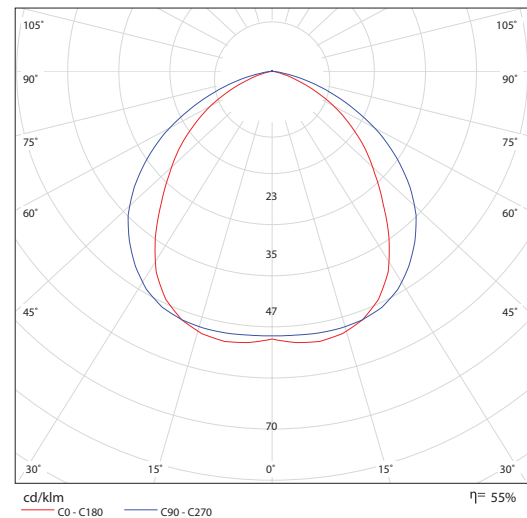

Applications



Retail



Residential



Malls

DeltaLum Shelf & Cabinet Lights



DL-SCL	Segment	Wattage Range	Lumen Range
	Commercial & Residential	Selectable Wattage (3-16W)	315-1,680lm

Ordering Information Example: DL-SCL/1F/MW/MK/120V


Family Name	Fixture Type	Length	Wattage	CCT (Kelvin)	Voltage
DL (Deltalum)	SCL (Shelf & Cabinet Lights)	1F (1ft) 2F (2ft) 3F (3ft) 4F (4ft)	MW (Selectable Wattage)	MK (Selectable Kelvin/ CCT)	120V

Product Information


Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Delivered Lumens (lumen)	CCT (K)	CRI	Damp Location	M.O.L (inch)	Case QTY.
3680107	DL-SCL/1F/MW/MK/120V	5-3	120V	50,000	525-315	30-40-50	≥80	Yes	12.32	30
3680108	DL-SCL/2FS/MW/MK/120V	7-4.2	120V	50,000	735-440	30-40-50	≥80	Yes	21.38	30
3680109	DL-SCL/2FL/MW/MK/120V	9-5.5	120V	50,000	945-578	30-40-50	≥80	Yes	22.56	30
3680110	DL-SCL/3F/MW/MK/120V	12-7.5	120V	50,000	1260-788	30-40-50	≥80	Yes	34.37	30
3680111	DL-SCL/4F/MW/MK/120V	16-9.5	120V	50,000	1680-998	30-40-50	≥80	Yes	46.18	30
3660313	DL-SCL/WB	DL-SCL Shelf / Cabinet Ltg., Wiring Box								

Accessories supplied per fixture.


"L" Mounting Clip × 2




"U" Mounting Clip × 2




Drywall Screws × 2




Anchors × 2




End Cap × 1



Linking Cord × 1

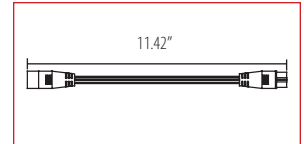

Power Cord × 1

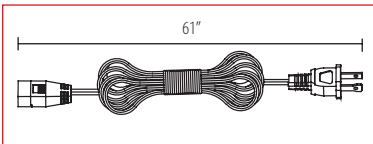

Related Products



DL-EC2



RGD-ECL



RGD-CDR



RGD-BLP6