

LED Regressed Gimbal Downlight



EDA-ECL	Segment	Wattage Range	Lumen Range
	Commercial & Residential	17W	1,268lm

Features

- 4" LED gimbal light, CRI 90, Air Tight, Adjustable Tilt
- Wet Location rated with operating temperature range of $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$.
- Field Selectable CCT (2700K, 3000K, 3500K, 4000K & 5000K)
- Available in brushed nickel, black and white
- IC-rated for direct contact with insulation.

Specifications

Housing:

Die Cast Aluminum body for better Thermal Management
Type IC rated, FT6 cable

Optics:

Beam angle 38°

Mounting:

Recessed Mounting with Spring Clamps

Driver:

120-347V LED driver with Operating temperature range of $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$


LED:

Field Selectable CCT of 2700K, 3000K, 3500K, 4000K & 5000K.


Controls:

0-10V dimming

Dimensional Drawing

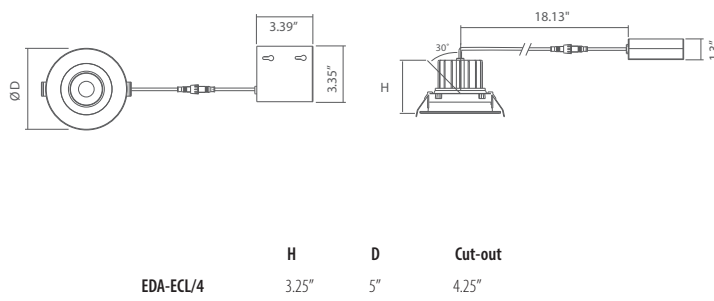

Polar Candela

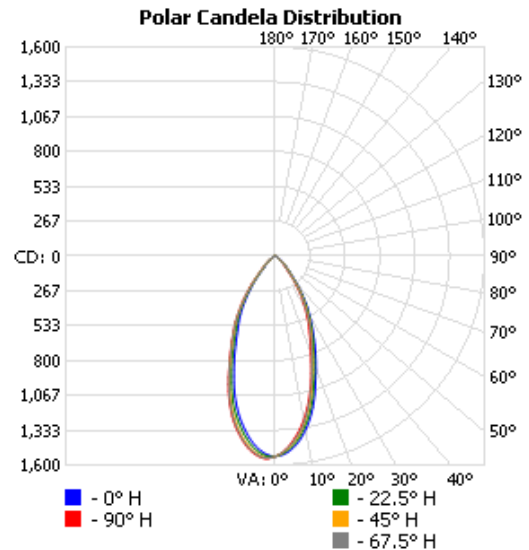

Applications



Offices



Hotels



Residences

LED Regressed Gimbal Downlight



EDA-ECL	Segment	Wattage Range	Lumen Range
	Commercial & Residential	17W	1,268lm

Ordering Information Example: EDA-ECL/4/17W/MK9/120-347V/WH/0-10V

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Trim Finish	Dimmable
EDA (ENDURA)	ECL (LED regressed gimbal downlight)	4 (4")	17W	MK9 (Selectable Kelvin, CRI≥90)	120-347V	WH (White) BN (Brushed nickel) BK (Black)	0-10V

Product Information

Ordering Code	Energy Star	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Case QTY.
3662228	Yes	EDA-ECL/4/17W/MK9/120-347V/WH/0-10V	17	120-347	50,000	1268	27/30/35/40/50	≥90	Yes	12
3662229	Yes	EDA-ECL/4/17W/MK9/120-347V/BN/0-10V	17	120-347	50,000	1268	27/30/35/40/50	≥90	Yes	12
3662230	Yes	EDA-ECL/4/17W/MK9/120-347V/BK/0-10V	17	120-347	50,000	1268	27/30/35/40/50	≥90	Yes	12

Accessories

PL-AMP-MULTI-VPLUS



PL-AMP4-VPLUS



Related Products

 RGD-ECL/4/Frame	 EDA-HS	 RGD-SP3	 RGD-CDR
--	---	---	--