

# T8 LED Bypass

## HD-T8BPSP (Selectable CCT)



5-year limited warranty

Operating temperature range -20°C ~ +45°C

4 ft, G13



8 ft, Fa8  
Fa8 default (Switchable Socket R17d supplied)




### Features & Benefits

- DLC, cUL listed
- PET film, ShatterProtect<sup>1</sup>, 120-347V
- External ballast not required, use existing lamp holders (non-shunted / shunted)
- Double-ended installation
- Our safety features allow for installation as well as misapplication protection<sup>2</sup>
- High CRI (82+), beam angle 180°, 50000 hours life (L70)
- NSF/ANSI 2 certified<sup>3</sup>

<sup>1</sup> ShatterProtect utilizes PET film to reduce the unexpected risk of shattering <sup>2</sup> Need to work with NSF certified lighting fixtures. <sup>3</sup> Contact your local Turolight representative for detail

### Dimensional Drawing

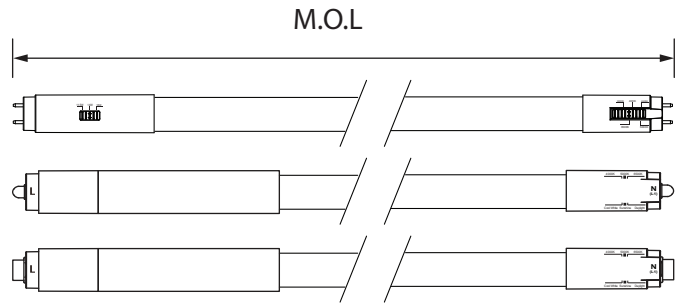

### Ordering Information Example: HD-T8BPSP/8F/38W/3CCT/F/DE/120-347V

Family Name	Lamp Type	Base	Wattage	CCT	Frost	Installation	Voltage
HD	T8BPSP (T8 Bypass, shatter protect)	Blank (G13) 8F (Fa8-R17d)	MW (Selectable Wattage) 38W	5CCT (30-35-40-50-65K) 3CCT (40-50-65K)	F (Frost)	DE (Double-ended)	120-347V

### Product Specification

Ordering Code	DLC	Model Number	Wattage (W)	Voltage (V)	Initial Lumens(lm)	Base	Hour Rating	Beam Angle	CCT(K)	CRI	M.O.L. (inch)	Case QTY.
1759000	Yes	HD-T8BPSP/MW/5CCT/F/DE/120-347V (4FT)	11.5-14-16	120-347	1800-2200-2400	G13	50,000	180°	30-35-40-50-65	82	48	25
1755002	Yes	HD-T8BPSP/8F/38W/3CCT/F/DE/120-347V (8FT)*	38	120-347	5500	Fa8-R17d	50,000	160°	40-50-65	83	96	10

\* Switchable socket G13+FA8&R17D with the default socket Fa8, DLC-S is only applicable to the Fa8 socket

