

LED Regressed Gimbal Downlight



RGD-ECL/DTW	Segment	Wattage Range	Lumen Range
	Commercial & Residential	12W	900lm

Features

- 4" LED gimbal light, CRI 90, Air Tight, Adjustable Tilt
- Dim-to-Warm 3000K-1800K
- Wet Location rated with operating temperature range of -20 °C ~ + 40 °C.
- White finish



Specifications

Housing:

Die Cast Aluminum body for better Thermal Management
Type IC rated, FT6 cable

Optics:

Beam angle 38°

Mounting:

Recessed Mounting with Spring Clamps

Driver:

120V LED driver with Operating temperature range of -20 °C ~ +40 °C

LED:


Dim-to-Warm 3000K-1800K

Controls:

TRIAC/ELV Dimmer




Dimensional Drawing

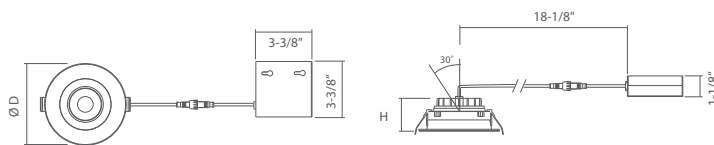

	H	D	Cut-out
RGD-ECL/4/12W/DTW	2-1/2"	5"	4-1/4"

Polar Candela

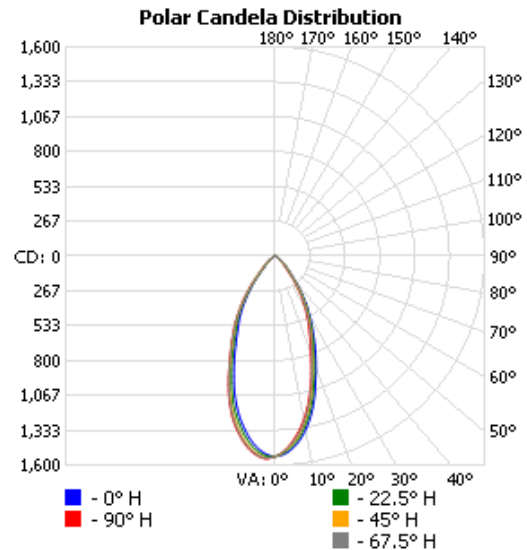

Applications



Offices



Hotels



Residences

LED Regressed Gimbal Downlight



RGD-ECL/DTW	Segment	Wattage Range	Lumen Range
	Commercial & Residential	12W	900lm

Ordering Information Example: RGD-ECL/4/12W/DTW/120/WH/D

Family Name	Fixture Type	Size	Wattage	CCT (Kelvin)	Voltage	Trim Finish	Dimmable
RGD (Rigid)	ECL (LED regressed gimbal downlight)	4 (4")	12W	DTW (Dim-to-Warm)	120 (120V)	WH (White)	D (TRIAC dimmable)

Product Information

Ordering Code	Model Number	Description	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Case QTY.
3662186	RGD-ECL/4/12W/DTW/120/WH/D	4" Regressed Gimbal, 12W (850lm), CRI 90, Dim-to-Warm 30K-18K, Triac, 38 Deg. FT6 cable, White, 120V	12	120	50,000	900	Dim-to-Warm 3000K-1800K	≥90	Yes	12
3660220	PL-AMP-MULTI-VPLUS	Multi-Cutout Plate for recessed Down lights, accommodates ECL Series								
3660239	RGD-ECL/4/REF/24D	Reflector, 24 Degree (4" Dia. regressed gimbal)								
3660240	RGD-ECL/4/REF/60D	Reflector, 60 Degree (4" Dia. regressed gimbal)								

Accessories

PL-AMP-MULTI-VPLUS



Related Products



RGD-CHY2



PRO-SP6



RGD-RSP



RGD-HS2