


# LED Retrofit Slim Panel



RGD-RSP	Segment	Wattage Range	Lumen Range
	Commercial & Industrial	9W	700lm

## Features

- TRIAC Dimming, 120V, CRI ≥ 80
- All-In-One design
- Edge-lit slim profile suitable for low-depth installation.
- 2 Bezel color options (Black and White)
- 5 field selectable CCT options (27K, 30K, 35K, 40K & 50K).
- Damp Location rated with operating temperature range of -20 °C - + 40 °C.



## Specifications

### Housing:

Pressure Die Cast Aluminum body to ensure better Thermal Management.

### Optics:

Premium-grade opal diffuser for even and glare-free light distribution.

### Mounting:

Mount easily into 4" octagonal junction box or 4" recessed can.

### Driver:

120V LED driver with Operating temperature range of -20 °C - +40 °C.

### LED:


5 field selectable CCT options of 27K, 30K, 35K, 40K & 50K.

### Controls:


TRIAC Dimming




## Polar Candela

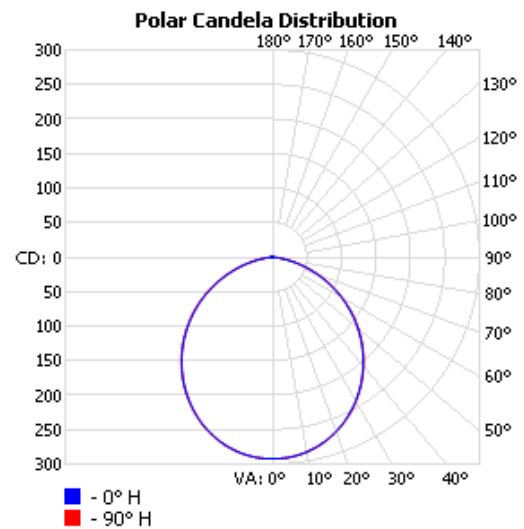


## Dimensional Drawing

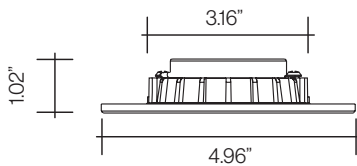

### J-box Installation



### Can Installation



## Applications



Offices



Malls



Hotels



Residences

# LED Retrofit Slim Panel



<b>RGD-RSP</b>	<b>Segment</b>	<b>Wattage Range</b>	<b>Lumen Range</b>
	Commercial & Industrial	9W	700lm

## Ordering Information Example: RGD-RSP/4/9W/MK5/120V/WH/D

Family Name	Fixture Type	Size	Wattage	CCT	Voltage	Finish Color	Dimmable
RGD (Rigid)	RSP (Retrofit Slim Panel)	4 (4")	9W	MK5 (5 CCT Selectable)	120V	WH (White)	D (TRIAC Dimming)

## Product Specification

Ordering Code	Model Number	Wattage (W)	Input Voltage (V)	Hour Rating	Initial Lumens (lumen)	CCT (K)	CRI	Beam Angle	Damp Location	Dimmable	Dimension D×H (inch)	Case QTY.
3662183	RGD-RSP/4/9W/MK5/120V/WH/D	9	120V	50,000	700	27/30/35/40/50	80	120°	Yes	Y	4.96" × 1.02"	20
3660331	RGD-RSP/4/BK	RGD-RSP 4" Retrofit Slim Panel, Black Trim Ring										
3660338	RGD-RSP/4/Kit	RIGID RSP, 4", Kit for can installation										



RGD-RSP/4/BK



RGD-RSP/4/Kit

## Related Products



EDA-ECL



RGD-CHY2



RGD-JH2



RGD-HS