

LED Cylinder



SSL-ESC (New)	Segment	Wattage Range	Lumen Range
	Commercial & Residential	Selectable Wattage (40W-10W)	4,800-1,200lm

Features

- Pressure Die Cast Aluminum housing for better Thermal Management.
- IP65 Wet Location rated with operating temperature range of -40 °C ~ +40 °C.
- Field Selectable CCT (3000K, 4000K & 5000K) along with 120-347V LED Auto-Sensing driver.
- Available in 45° beam angle (option of 25° & 60° beam angle) with Field Selectable Multi-wattage variant.

Specifications

Housing:

Black Finish Pressure Die Cast Aluminum Body for better Thermal Management.

Optics:

Premium Grade PC Lens with Glass Cover.

Mounting:

Ceiling, Wall and Pendent mounting options.

Driver:


120-347V LED Auto-Sensing driver with Operating temperature range of -40 °C ~ +40 °C.

LED:


Field Selectable CCT of 3000K, 4000K & 5000K. Efficacy of $\geq 105\text{lm/w}$.

Controls:


Built-in Photocell & Compatible with 0-10V Dimming

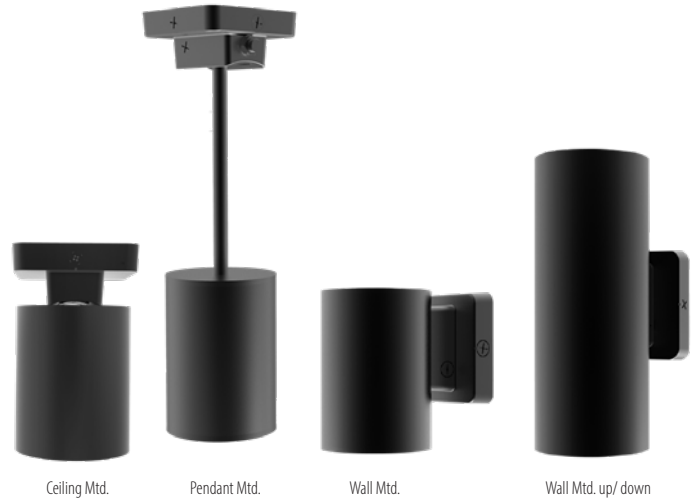

Dimensional Drawing

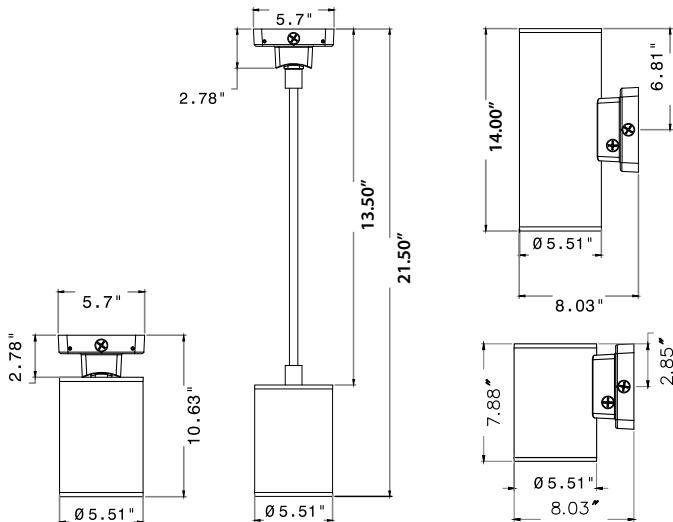

Polar Candela

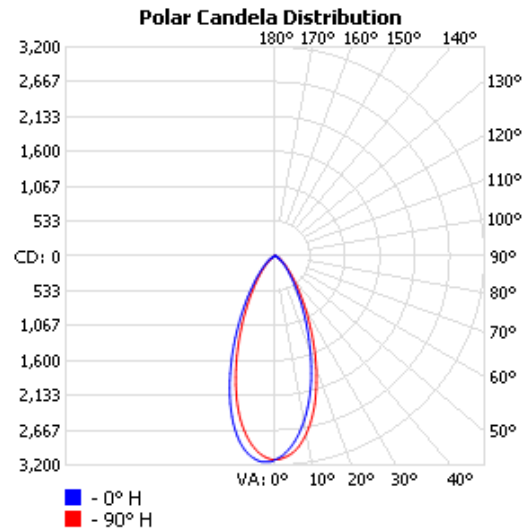

Applications



Residences



Hotels



Restaurants



Malls

LED Cylinder



SSL-ESC (New)	Segment	Wattage Range	Lumen Range
	Commercial & Residential	Selectable Wattage (40W-10W)	4,800-1,200lm

Ordering Information SSL-ESC/W/20/MW/MK/120-347V/45D/BK/PC

Family Name	Fixture Type	Mounting	Wattage	CCT	Voltage	Beam Angle*	Finish Color	Photocell
SSL (Solid state lighting)	ESC (LED cylinder)	C (Ceiling Mtd.) P (Pendant Mtd.) W (Wall Mtd.) WUD (Wall Mtd. up/ down)	20/MW (Selectable Wattage, Max. 20W) 20/MW (Selectable Wattage, Max. 40W)	MK (Selectable Kelvin/CCT)	120-347V	45D (45° Default) 25D, 60D (25°, 60° Optional)	BK (Black)	PC (Default)
						* ESC/WUD, 45° up/ 45° down		

Product Information

Ordering Code	Model Number	Wattage (W)	Voltage (V)	Hour Rating	Lumens (lm)	CCT (K)	CRI	Wet Location	Mounting	Case QTY.
3680388	SSL-ESC/W/20/MW/MK/120-347V/45D/BK/PC	20-15-10	120-347V	50,000	2400-1800-1200	30-40-50	≥70	Yes	Wall Mtd.	4
3680389	SSL-ESC/C/20/MW/MK/120-347V/45D/BK/PC	20-15-10	120-347V	50,000	2400-1800-1200	30-40-50	≥70	Yes	Ceiling Mtd.	4
3680390	SSL-ESC/P/20/MW/MK/120-347V/45D/BK/PC	20-15-10	120-347V	50,000	2400-1800-1200	30-40-50	≥70	Yes	Pendant Mtd.	4
3680391	SSL-ESC/WUD/40/MW/MK/120-347V/45D/BK/PC	40UD-20UD-20D-20U	120-347V	50,000	4800UD-2400UD-2400D-2400Ulm	30-40-50	≥70	Yes	Wall Mtd. up/ down	4
3660207	SSL-ESC/LENS/25D	25° lens								
3660209	SSL-ESC/LENS/60D	60° lens								

Related Products



RGD-CDR



RGD-CHY2



PRO-SP5



RGD-HS