

LED FIXTURE

SSL Series



LED Glass Wall Pack SSL-WP1T+

Impact Resistant Tempered Glass lens, 120-347V auto-sensing driver, built-in Photo-cell with On/Off Switch Selectable wattage and selectable kelvin selection



5-year limited warranty


Operating temperature range -40° C ~ +40° C



Features & Benefits

- cULus listed, DLC Premium
- 120-347V auto sensing driver, 0-10V dimming
- Selectable CCT (30K/40K/50K), selectable wattage
- Built-in Photocell with On/Off Switch
- Junction box or wall mounted directly
- Die-cast aluminum with durable dark bronze or black coat finish
- L70 @ 50,000 Hrs, CRI≥80
- IP 65, wet location rated

Dimensional Drawing

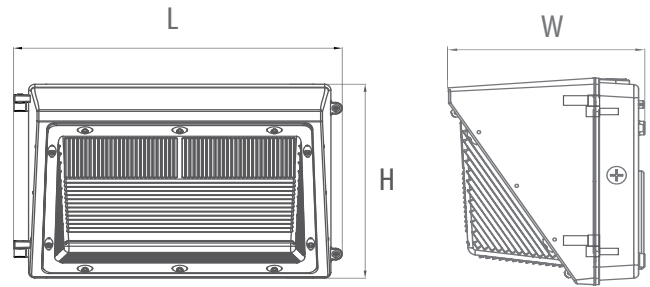

Ordering Information Example: SSL-WP1T+/60M/MW/MK/120-347V/D/DB

| Family Name | Fixture Type | Wattage | CCT | Voltage | Dimmable | Finish |
|----------------------------|-----------------------------|---|----------------------------|----------|--------------|--------------------------------|
| SSL (Solid state lighting) | WP1T+ (LED glass wall pack) | 60M/MW (Max. 60W Selectable Wattage) 120XL/MW (Max. 120W Selectable Wattage) | MK (Selectable Kelvin/CCT) | 120-347V | D (Dimmable) | DB (Dark bronze) BK (Black) |

Product Specification

| Ordering Code | DLC Premium | Model Number | Wattage (W) | Input Voltage (V) | L70-Hour Rating | Initial Delivered Lumens (lumen) | CCT (K) | CRI | Wet Location | Dimension L×W×H(inch) | Case QTY. |
|---------------|-------------|-------------------------------------|---------------|-------------------|-----------------|----------------------------------|----------|-----|--------------|-----------------------|-----------|
| 3682247 | Y | SSL-WP1T+/60M/MW/MK/120-347V/D/DB | 60-50-40-30 | 120-347V | 50,000 | 8700-7250-5800-4350 | 30-40-50 | ≥80 | Yes | 14.3"x 9"x7.8" | 2 |
| 3682248 | Y | SSL-WP1T+/120XL/MW/MK/120-347V/D/BK | 120-105-90-75 | 120-347V | 50,000 | 17400-15225-13050-10875 | 30-40-50 | ≥80 | Yes | 14.3"x 9"x7.8" | 2 |
| 3682249 | Y | SSL-WP1T+/120XL/MW/MK/120-347V/D/DB | 120-105-90-75 | 120-347V | 50,000 | 17400-15225-13050-10875 | 30-40-50 | ≥80 | Yes | 14.3"x 9"x7.8" | 2 |