

Project:			
Ordering info:			
Submitted by:		Date:	



Linear Surface Luminaire

ZNTH60-SD



Wattage Range
24-79W


Lumen Range
3,262-11,000lm


Efficacy
138lm/W

Light Performance
816-1,375lm/ft

3CCT Selectable
3000K 3500K 4000K

Finishes
Black White



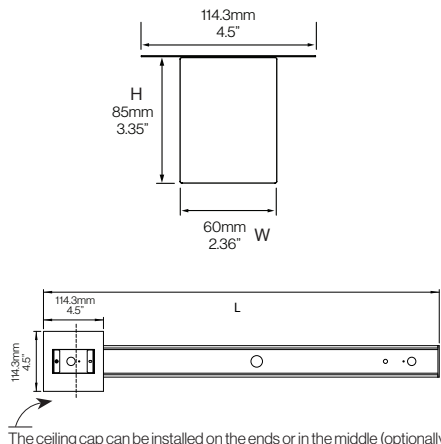The ceiling cap can be installed on the ends or in the middle (optionally)

	L	W	H
4FT	1200mm 47.24"	60mm 2.36"	85mm 3.35"
8FT	2390mm 94.09"	60mm 2.36"	85mm 3.35"

Ordering Guide Example: ZNTH60-SD/4/F/05L/MK3/80/UN3/D1/B

Family/ Series	Mounting		Function		Length		Diffuser		Direct	Max Total Lumens		CCT 30/35/40K	CRI	Voltage		Driver	Housing Finish	
ZNTH60	S	Surface	D	Direct	4	4ft	F	Frosted	05L	5000 (4ft)	MK3	80	UN3	120-347V		D1	0-10V Dim 1%	W White B Black C Custom
					8	8ft			10L	10000 (8ft)								

Light Outputs Function: Direct

Catalogue Code	Voltage	Dimension			CCT	Efficacy lm/W	CRI	Direct		
		L	W	H				Watts	Delivered Lumens	Lumens per foot
ZNTH60-SD/4	120-347V	47.24"	2.36"	3.35"	30K-35K-40K	130	80+	39	5300	1325
								32	4349	1087
								24	3262	816
ZNTH60-SD/8	120-347V	94.09"	2.36"	3.35"	30K-35K-40K	130	80+	79	11000	1375
								63	8772	1097
								48	6684	836

Project:			
Ordering info:			
Submitted by:		Date:	



Specifications


Housing:	The Zenith60 housing is constructed of extruded aluminum 6063T5.	LED:	Name brand LED with long life offered in standard 80+ CRI. On board selectable CCT offers maximum flexibility (3000K/3500K/4000K).
End Caps:	Die cast aluminum fastened to housing with internal fasteners and a discrete internal knockout for Surface mount versions.	Finish:	Polyester powder painted finish
Optics:	Frosted polycarbonate snap in lens with Lambertian distribution.	【Joiner Kit is included with fixture, to be used for Row Mounting.】	
Driver:	LED drivers for Direct outputs are contractor wattage selectable and universal 120-347V input (up to 3 different outputs-see output chart). Less than 20%THD and 0-10V dimmable down to 1%.		

Model & Ordering Information

Ordering Code	DLC Premium	Model Number	Description	Case QTY
3695008	Yes	ZNTH60-SD/4/F/05L/MK3/80/UN3/D1/B	4Ft., Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	4
3695009	Yes	ZNTH60-SD/4/F/05L/MK3/80/UN3/D1/W	4Ft., Selectable 40-33-25W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	4
3696007	Yes	ZNTH60-SD/8/F/10L/MK3/80/UN3/D1/B	8Ft., Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, Black Finish.	2
3696008	Yes	ZNTH60-SD/8/F/10L/MK3/80/UN3/D1/W	8Ft., Selectable 80-66-50W, Selectable 30-35-40K, 120-347V, 0-10V Dim 1%, White Finish.	2
3690005	-	ZNTH60-BP	Emergency Battery Pack	-
3690004	-	ZNTH60-K4	Joiner Kit, for Row mounting.	-

Mounting

Install ceiling cap in the end or middle position

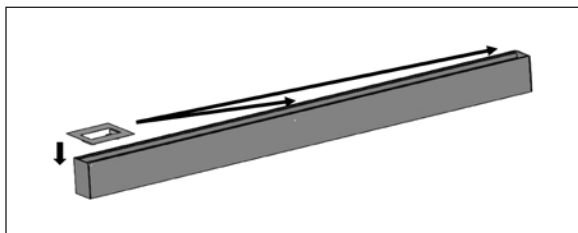

Install fixtures to ceiling

