



LED FIXTURE

TL Series

LED Emergency TL-RMES101

"Running Man" LED Emergency Sign



Features & Benefits

Injection-molded thermoplastic housing

Easy installation

Ni-cd battery backup for 90 minutes

Universal (wall, ceiling) mounting

SMD LED


120/347VAC input voltage

3 Pictograms included, single or double face

cUL listed / IP20

Test switch and charge indicator light

Dimensional Drawing

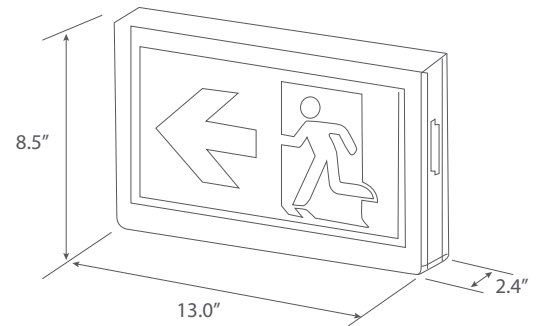

Arrow right 2pcs



Without Arrow 1pc

Warranty

5-year limited warranty in commercial use from the date of purchase

Operating temperature range between 0°C and +40°C

Ordering Information

 Example: TL-RMES003

Family Name	Fixture Type	Model
TL (Turolight)	RMES ("Running Man" Emergency Sign)	101 (Emergency Sign)

Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	Mounting	Remote Capable	Self Powered Battery	Damp Location	Dimensions L×W×H (inch)	Case QTY.
3461114	TL-RMES101	"Running Man" LED Emergency Sign, White Housing AC only	3W	120/347VAC	wall, ceiling	No	Yes (90 minutes)	Yes	13.0 × 8.5 × 2.4	6