

# LED FIXTURE

TL Series



## LED Emergency Combo Sign TL-RMES302-5W

"Running Man" LED emergency combo sign



2-year limited warranty


Operating temperature range -10 °C ~ +40 °C



### Features & Benefits

- Metal housing c/w 36W 6V battery pack, allows for the addition of remote heads
- Lead-acid battery 6V/6Ah backup for 0.5hrs
- 5W x 2 lamp adjustable heads
- Universal (wall, ceiling, side) mounting capable
- 3 Pictograms included, single/ double face
- Test switch and charge indicator light
- CSA C22.2 No 141-15
- IP20, damp location rated

### Dimensional Drawing

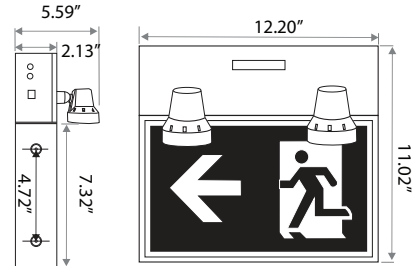

### Ordering Information Example: TL-RMES302-5W

Family Name	Fixture Type	Model
TL (Turolight)	RMES ("Running Man" emergency sign)	302-5W ("Running Man" combo sign, metal, additional 6VDC remote head capable, self powered, 5W x 2 lamp adjustable heads)

### Product Specification

Ordering Code	Model Number	Description	Wattage (W)	Input Voltage (V)	Mounting	Remote Capable	Damp Location	Dimensions LxWxH (inch)	Case QTY.
3461221	TL-RMES302-5W	Running Man LED Combo, Metal Hsg, 120/347V, 2X5W, Max: 34W - 30 Mins.	36W	120/347V	Wall	Yes	Yes	12.2"x11.02"x2.13"	6

### Emergency Runtime Charts

Emergency Run Time in Minutes	Wattage	No of additional Heads	
		2W	5W
30	36	11	4
60	25	6	2
90	18	3	1
120	12	-	-

\* Actual wattage loads may be affected by length and gauge of the wire runs used to connect the remote heads.  
\* It is recommended to load battery pack 20% under their maximum load.



Arrow 2pcs



Without arrow 1pc